




Platform Lengths - Configurations Self Weight - Load Capacities

TOTAL LENGTH		CANTILEVER LENGTH		HOIST DISTANCE		PLATFORM CONFIGURATION (M) = END STIRRUP	TOTAL PLATFORM WEIGHT		MAXIMUM RATED WORKING LOAD	
FT	M	FT	M	FT	M		LB	KG	LB	KG
6' - 9"	2	NONE		6' - 9"	2	2	257	117		
9' - 9"	3	NONE		9' - 9"	3	3	306	139		
13' - 6"	4	NONE		13' - 6"	4	2-2	358	163	2000	900
16' - 6"	5	NONE		16' - 6"	5	3-2	407	185		
19' - 6"	6	NONE		19' - 6"	6	3-3	456	207		
23' - 3"	7	NONE		23' - 3"	7	2-3-2	508	231	1500	680
26' - 3"	8	NONE		26' - 3"	8	3-2-3	557	253		
29' - 3"	9	NONE		29' - 3"	9	3-3-3	606	275		
33' - 0"	10	NONE		33' - 0"	10	3-2-2-3	658	299	1000	450
36' - 0"	11	NONE		36' - 0"	11	3-3-2-3	707	321		
39' - 0"	12	NONE		39' - 0"	12	3-3-3-3	756	343		
42' - 9"	13	NONE		42' - 9"	13	3-3-2-2-3	808	367	750	340
45' - 9"	14	NONE		45' - 9"	14	3-3-2-3-3	857	389		
48' - 9"	15	NONE		48' - 9"	15	3-3-3-3-3	906	411		
FT	M	FT	M	FT	M	USING "C" - STIRRUP	LB	KG	LB	KG
23' - 3"	7	3' - 9"	1	16' - 6"	5	2-3-2	662	301		
26' - 3"	8	3' - 9"	1	19' - 6"	6	3-2-3	711	323		
30' - 9"	9	3' - 9"	1	23' - 3"	7	3-3-3	760	345		
33' - 9"	10	3' - 9"	1	26' - 3"	8	3-2-2-3	812	369	1000	450
36' - 9"	11	3' - 9"	1	29' - 3"	9	3-2-3-3	861	391		
40' - 6"	12	3' - 9"	1	33' - 0"	10	3-3-3-3	910	413		
43' - 6"	13	3' - 9"	1	36' - 0"	11	3-3-2-2-3	962	437		
46' - 6"	14	3' - 9"	1	39' - 0"	12	3-3-2-3-3	1011	459		
50' - 3"	15	3' - 9"	1	42' - 9"	13	3-3-3-3-3	1060	481	750	340
53' - 3"	16	3' - 9"	1	45' - 9"	14	3-3-2-2-3-3	1112	505		
56' - 3"	17	3' - 9"	1	48' - 9"	15	3-3-3-2-3-3	1161	527		
46' - 6"	14	6' - 9"	2	33' - 0"	10	3-3-2-3-3	1011	459		
49' - 6"	15	6' - 9"	2	36' - 0"	11	3-3-3-3-3	1060	481		
52' - 6"	16	6' - 9"	2	39' - 0"	12	3-3-2-2-3-3	1112	505	750	340
56' - 3"	17	6' - 9"	2	42' - 9"	13	3-3-3-2-3-3	1161	527		
59' - 3"	18	6' - 9"	2	45' - 9"	14	3-3-3-3-3-3	1210	549		
62' - 3"	19	6' - 9"	2	48' - 9"	15	3-3-3-2-2-3-3	1262	573		

EXPLANATION OF CANTILEVERED SECTIONS

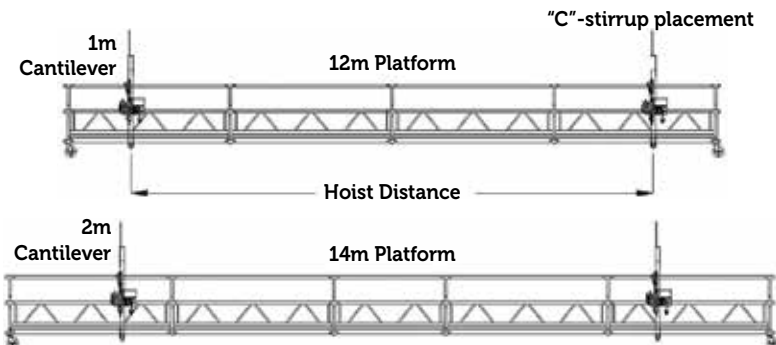

TOTAL PLATFORM WEIGHT INCLUDES:

(4) casters, (2) end or low profile C-stirrups, (2) roller bumpers, EXCLUDES hoists or electric cable.

NOTES:

- All platform configurations as shown in the chart were tested and classified by UL.
- Any platform configuration not listed on this chart must be approved by Bee Access or a competent and trained person from an authorized dealer.
- Chart above takes into consideration the use of (2) hoists.
- Rated Working Load must be evenly distributed on Platform.



2145 Indian Road, West Palm Beach, FL 33409
Phone: 561.616.9003 www.beeaccess.com

