

TRACTION HOIST FOR SUSPENDED PLATFORM


BISOMAC308

The Newest Technology To Maximize
Performance, Safety And Reliability
In A Compact, Lightweight Package



DESCRIPTION & SPECIFICATIONS

BISOMAC 308

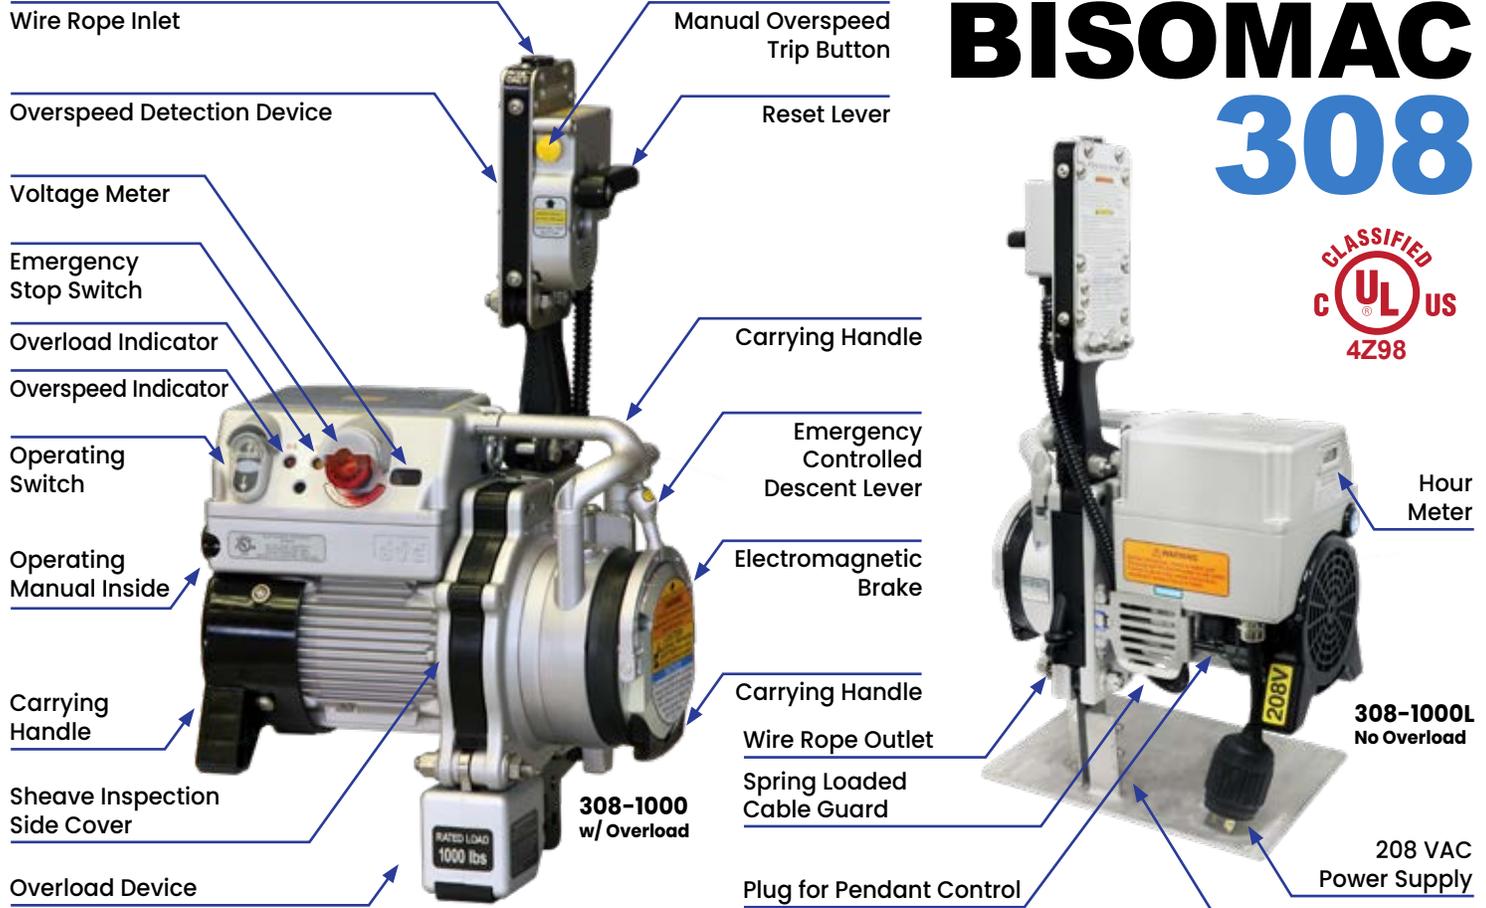

SAFETY

Overspeed detection device with power cut-off. Overload device integrated into all models except 308-1000L. Optional slack rope device provides extra safety of a second wire rope. Quality construction and foolproof operation prevent malfunctions.

HANDLING

The lightweight, compact design allows for easy handling and set-up. Spring loaded cable guard for easy access to plug connections. Fold-up stirrup bar design for easy storage, transportation and bench access for maintenance (only on 308-1000L models). Built-in carrying handles on top and under fan cover.

PERFORMANCE

Industry leading low voltage performance. Durable construction for reliability and longevity. Patented traction principle that is easy on the wire rope and avoids rope jams. Fully compatible with existing stirrups.

MAINTENANCE

Quick turnaround service with easy access sheave inspection side covers. Fewest number of wear parts of any hoist on the market, reducing service time and operating cost. Easy (dis)assembly due to minimal number of bolts and components.



MODEL	RATED LOAD	VOLTAGE	RATED CURRENT	WIRE ROPE DIAMETER	WEIGHT	OVERLOAD DEVICE	APPLICABLE STANDARD
308-1000L	1000 lbs	1P 208V 60 Hz	10A	5/16 inch (8.0 - 8.4 mm)	94 lb (43kg)	No	UL1323
308-1258U	1250 lbs		11.5A		101 lb (46kg)	Equipped	
308-1000	1000 lbs		10A				
308-3P1000	1000 lbs	3P 208V 60 Hz	9A			UL1323 CAN/CSA-Z271-10	



2145 Indian Road, West Palm Beach, FL 33409
Phone: 561.616.9003 www.beeaccess.com

NIHON BISOH
www.bisoh.co.jp/en
SAIA SCAFFOLD & ACCESS
INDUSTRY ASSOCIATION