


INCLINE STIRRUP

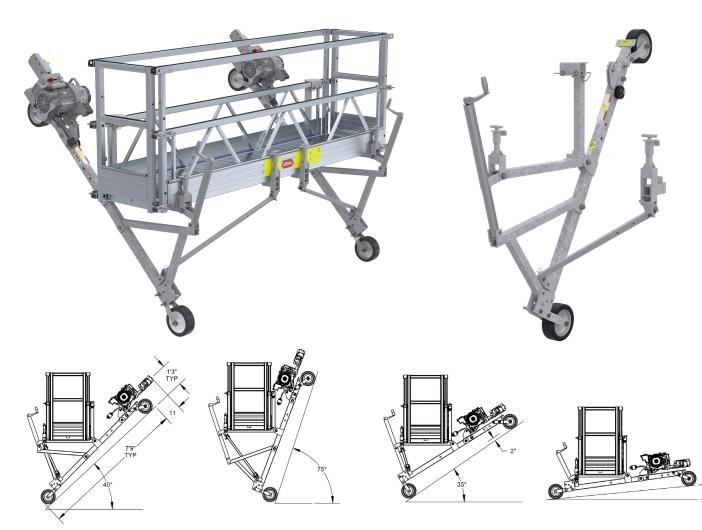

Demonstrates the Incline Stirrup with the jack support weldment, allowing level access to 40-75 degree surfaces.

The incline stirrup is ideal for dams, pyramid shaped buildings and other structures that are under an incline. The adjustments are infinite from 5-35 degrees or 40-75 degrees with supplied adapter bracket.

The incline stirrup is extremely versatile and can be mounted anywhere along the platforms' side frame. The hoist mounting bracket fits all popular traction hoists. Various wheel configurations are available. Demonstrates the Incline Stirrup without the jack support weldment, allowing level access to 5-35 degree surfaces.

	Part No.: 934139
SN	Load Capacity: 1,500 lb
0	Dimensions: 82" x 9" x 7" (HxWxD)
AT	Weight: 134 lb
FIC	Construction: Steel
U U U	Finish: Grey Powder Coating or Galvanized
SPI	