


Bee Access offers high-performance wire rope, hardware and accessories specifically designed for both temporary and permanent suspended scaffolding, ensuring long-lasting durability and reliable performance.

## CLIMB-ME® 8.3mm Wire Rope

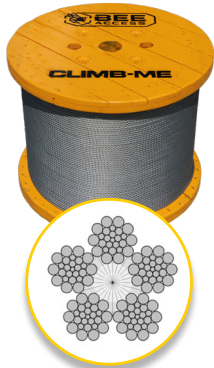

The highest-quality wire rope on the market, engineered for superior performance & long service. All of our wire rope is tested to meet our exact specifications & inspected prior to distribution. Compatible with any traction hoist brand.

- **Construction:** 8.3 mm (0.325"), 5x26 Warrington Seale, Polypropylene Core, Galvanized Finish
- **Standards:** ISO 9000
- **Length:** Stocked 5000 ft spools. Contact us for custom lengths & finishes

## CLIMB-ME® 1/4in Wire Rope



Our wire rope is designed specifically for material hoists, including the Fixator LM Series. It meets ISO 9000 standards, with every spool inspected to precise specifications. It is available in various lengths and configurations, including turnback thimble eye, swivel hook, copper stop, and shackle finishes.

- **Construction:** 1/4", 6x19
- **Standards:** ISO 9000
- **Length:** Contact us for custom lengths & finishes

## Thimble



Wire rope thimbles support wire rope eyes by creating a durable wear surface when connected to rigging hardware. The thimble protects the rope eye area by preventing damage such as pinching, crushing, or fraying.

- **Construction:** Galvanized
- **Sizes:** 3/16", 1/4", 3/8", 5/16", 5/8"
- Insulated thimbles for welding applications are available for individual purchase or part of our Platform Welding Packages

## Swage Sleeves



Swage Sleeves are also known as "ferrule sleeves", cylindrical metal tubes used for terminating the ends of wire rope. Used in rigging and lifting applications because they are strong, low maintenance and cost-effective.

- **Construction:** Copper with Zinc Plated Finish
- **Sleeve Type:** Oval Sleeve
- **Available:** 1/4" & 5/16"
- **Tools:** Bench Swaging Tools available for purchase

## Alloy Hooks



Designed for lifting, towing and securing heavy loads, our Alloy Hook features high-strength steel and a safety latch to prevent detachment. Ideal for tough industrial and construction tasks.

- **Feature:** Swivel Eye Hook with Safety Latch
- **Construction:** Alloy Steel
- **Hook Opening:** 1"
- **Load Rating:** 2.5 Ton
- **Grade:** 8

## Shackles



Shackles are used to lift, secure, and rig heavy loads, acting as a key connection between wire rope and rigging points. Safety shackles with cotter pins are also available for added security.

- **Construction:** High Tensile Steel with Galvanized Finish
- **Pin Diameter:** 5/8"
- **Rated Capacity:** 3.25 - 4.25 Ton
- **Grade:** 6



# WIRE ROPE, HARDWARE & ACCESSORIES

PART NUMBER	DESCRIPTION
-------------	-------------

### 8.3MM WIRE ROPE

M526-1	CLIMB-ME Wire Rope, 8.3mm 5x26, 1ft
M526-5000	CLIMB-ME Wire Rope, 8.3mm 5x26, 5000ft
WRI108-BS	CLIMB-ME Wire Rope, 8.3mm 5x26, 5000ft
WRI108-BS-CC	CLIMB-ME Wire Rope, 8.3mm 5x26, 1ft
FWRCL-1083-35-T	CLIMB-ME Wire Rope Assy, TB Eye, 35ft
FWRCL-1083-100-T	CLIMB-ME Wire Rope Assy, TB Eye, 100ft
FWRCL-1083-125-T	CLIMB-ME Wire Rope Assy, TB Eye, 125ft
FWRCL-1083-150-T	CLIMB-ME Wire Rope Assy, TB Eye, 150ft
FWRCL-1083-175-T	CLIMB-ME Wire Rope Assy, TB Eye, 175ft
FWRCL-1083-200-T	CLIMB-ME Wire Rope Assy, TB Eye, 200ft
FWRCL-1083-250-T	CLIMB-ME Wire Rope Assy, TB Eye, 250ft
FWRCL-1083-300-T	CLIMB-ME Wire Rope Assy, TB Eye, 300ft
FWRCL-1083-350-T	CLIMB-ME Wire Rope Assy, TB Eye, 350ft
FWRCL-1083-400-T	CLIMB-ME Wire Rope Assy, FL Eye, 400ft
FWRCL-1083-500-T	CLIMB-ME Wire Rope Assy, FL Eye, 500ft
FWRCL-1083-600-T	CLIMB-ME Wire Rope Assy, FL Eye, 600ft

### 1/4" WIRE ROPE

WR025-1	CLIMB-ME Wire Rope, 1/4in 6x19, 1ft
---------	-------------------------------------

### THIMBLE

HW-HDTHI-1_4	Thimble, HD, Galv, Import, 1/4in
HW-HDTHI-3_16	Thimble, HD, Galv, Import, 3/16in
HW-HDTHI-3_8	Thimble, HD, Galv, Import, 3/8in
HW-HDTHI-5_16	Thimble, HD, Galv, Import, 5/16in
HW-HDTHI-5_8	Thimble, HD, Galv, Import, 5/8in
HW-ITH-5_16	Thimble, Insulated, 5/16in & 3/8in
920339	Thimble Adapter, Insulated

PART NUMBER	DESCRIPTION
-------------	-------------

### SWAGE SLEEVES

HW-ZPCDS-1_4	Swage Sleeve, Zn Pltd Copper Duplex, 1/4in
HW-ZPCDS-5_16	Swage Sleeve, Zn Pltd Copper Duplex, 5/16in
HW-NPSG	Swage Gauge for Copper Duplex Sleeve, Min 5
HW-NPBT300	Bench Swaging Tool, Nicopress Model 300
HW-NPBTHD-5_16	Swage Slve Hd Unit, Nicopress Mdl 300, 5/16in

### ALLOY HOOKS

HW-2.5-SWHK-VB	Hook, Swivel, Safety Latch, GR8, 2.5t
HW-2.5TVBAHSL	Hook, Safety Latch, GR8, 2.5t
HW-2TCRSL2	Safety Latch Replacement Kit, 2t Carbon, 3t Alloy

### SHACKLES

HW-SPASG-5_8	Shackle, Screw Pin, Galv, 5/8in, 4.25t
HW-SBASGCM-5_8	Shackle, Bolt+Nut+Cotter, Galv, 5/8in, 3.25t

### HARDWEAR & ACCESSORIES

HW-CSS-1_4	Copper Stop, 1/4in
HW-CSS-3_16	Copper Stop, 3/16in
HW-CSS-3_8	Copper Stop, 3/8in
HW-CSS-5_16	Copper Stop, 5/16in
HW-FGCM-5_16-2	Fist Grip, CM Dble Saddle, 5/16in, Set
PT-ECM-925-22	Coiling Machine, Model 925
PT-EC-600-COUNTER	600 Series Counter
PT-EC-600S-SPLIT	HD Payout Meter, 1in Dia, Side Split Option